

# TEST REPORT

**Report Number: 104274802MPK-002**  
**Project Number: G104274802**  
**Original Report Issue Date: May 18, 2020**  
**Revision Report Issue Date: July 21, 2020**

**Testing performed on**  
**CONEKT® Reader**  
**Model: PCR-620**

**FCC ID: T8I-CONEKT3**  
**IC: 6504A-CONEKT3**  
**to**


**FCC Part 15 Subpart C (15.247)**  
**Industry Canada RSS-247 Issue 2**

**For**

**Farpointe Data, Inc.**

Test Performed by:  
Intertek  
1365 Adams Court  
Menlo Park, CA 94025 USA

Test Authorized by:  
Farpointe Data, Inc.  
2195 Zanker Road  
San Jose, CA 95131 USA


Prepared by:  **Date:** May 18, 2020  
Aaron Chang

Reviewed by:  **Date:** May 18, 2020  
Krishna K Vemuri

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

Report No. 104274802MPK-002	
<b>Equipment Under Test:</b>	CONEKT® Reader
<b>Model Number:</b>	PCR-620
<b>Applicant:</b>	Farpointe Data, Inc.
<b>Contact:</b>	Kirk Bierach
<b>Address:</b>	Farpointe Data, Inc. 2195 Zanker Road San Jose, CA 95131
<b>Country:</b>	USA
<b>Tel. Number:</b>	(408) 731-8700
<b>Email:</b>	kirk.bierach@farpointedata.com
<b>Applicable Regulation:</b>	FCC Part 15 Subpart C (15.247) Industry Canada RSS-247 Issue 2
<b>Date of Test:</b>	September 11, 2018 & March 15 – May 7, 2020

*We attest to the accuracy of this report:*



Aaron Chang  
Project Engineer



Krishna K Vemuri  
EMC Manager

## TABLE OF CONTENTS

<b>1.0</b>	<b>Summary of Tests .....</b>	<b>4</b>
<b>2.0</b>	<b>General Information.....</b>	<b>5</b>
2.1	Product Description .....	5
2.2	Related Submittal(s) Grants.....	6
2.3	Test Facility .....	6
2.4	Test Methodology.....	6
2.5	Measurement Uncertainty.....	6
<b>3.0</b>	<b>System Test Configuration.....</b>	<b>7</b>
3.1	Support Equipment .....	7
3.2	Block Diagram of Test Setup.....	7
3.3	Justification.....	9
3.4	Software Exercise Program.....	9
3.5	Mode of Operation during Test.....	9
3.6	Modifications Required for Compliance .....	9
3.7	Additions, Deviations and Exclusions from Standards.....	9
<b>4.0</b>	<b>Measurement Results.....</b>	<b>10</b>
4.1	6-dB Bandwidth and 99% Occupied Bandwidth .....	10
4.2	Maximum Peak Conducted Output Power at Antenna Terminals .....	17
4.3	Maximum Power Spectral Density .....	21
4.4	Out of Band Antenna Conducted Emission .....	25
4.5	Transmitter Radiated Emissions .....	30
4.6	AC Line Conducted Emission .....	44
<b>5.0</b>	<b>List of Test Equipment .....</b>	<b>48</b>
<b>6.0</b>	<b>Document History .....</b>	<b>49</b>

**1.0 Summary of Tests**

<b>Test</b>	<b>Reference FCC</b>	<b>Reference Industry Canada</b>	<b>Result</b>
<b>RF Output Power</b>	15.247(b)(3)	RSS-247, 5.4.d)	Complies
<b>6 dB Bandwidth</b>	15.247(a)(2)	RSS-247, 5.2.a)	Complies
<b>Power Density</b>	15.247(e)	RSS-247, 5.2.b)	Complies
<b>Out of Band Antenna Conducted Emission</b>	15.247(d)	RSS-247, 5.5	Complies
<b>Transmitter Radiated Emissions</b>	15.247(d), 15.209, 15.205	RSS-247, 5.5	Complies
<b>AC Line Conducted Emission</b>	15.207	RSS-GEN	Complies
<b>Antenna Requirement</b>	15.203	RSS-GEN	Complies (Internal Antenna)

**EUT receive date:** March 15, 2020

**EUT receive condition:** The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

**Test start date:** March 15, 2020

**Test completion date:** May 7, 2020

The test results in this report pertain only to the item tested.

**2.0 General Information**

2.1 Product Description

Farpointe Data, Inc. supplied the following description of the EUT:

**CONEKT® MOBILE-READY CONTACTLESS SMARTCARD READER AND KEYPAD**

For more information, refer to the following product specification, declared by the manufacturer.

Information about the 2.4 GHz radio is presented below:

<b>Applicant</b>	Farpointe Data, Inc.
<b>Model No.</b>	PCR-620
<b>FCC Identifier</b>	T8I-CONEKT3
<b>IC Identifier</b>	6504A-CONEKT3
<b>Type of transmission</b>	Digital Transmission System (DTS)
<b>Rated RF Output</b>	1.74 dBm
<b>Antenna(s) &amp; Gain</b>	Internal Antenna, Gain: 2.1 dBi
<b>Frequency Range</b>	2402 – 2480 MHz
<b>Type of modulation/data rate</b>	GFSK / 1Mbit/s
<b>Number of Channel(s)</b>	40
<b>Applicant Name &amp; Address</b>	Farpointe Data, Inc. 2195 Zanker Road San Jose, CA 95131 USA

2.2 Related Submittal(s) Grants

None.

2.3 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.4 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidance for Performing Compliance Measurement on Digital Transmission Systems (DTS) Operating under §15.247” (KDB 558074 D01 DTS Meas Guidance v05r02), and RSS-247 Issue 2, RSS-GEN Issue 5.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10: 2013. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “Data Sheet” of this report.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn’t take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions – antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Measurement	Expanded Uncertainty (k=2)			
	0.15 MHz – 30MHz	30 – 200 MHz	200 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.7	4.6	5.1 dB
AC mains conducted emissions	2.1 dB	-	-	-

### 3.0 System Test Configuration


#### 3.1 Support Equipment

Support Equipment			
Description	Manufacturer	Model	Serial Number
DC Power Supply	Keysight	E3631A	MY67156007

#### 3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model	Serial Number
Radiated Sample of CONEKT® Readers	Farpointe Data, Inc.	PCR-620	SN1
Conducted Sample of CONEKT® Readers	Farpointe Data, Inc.	PCR-620	SN2

Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.

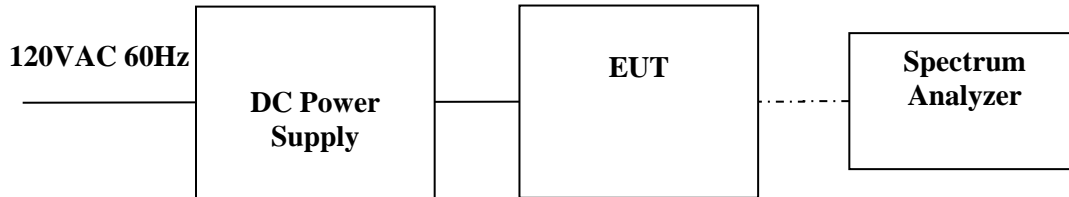

<b>S</b> = Shielded	<b>F</b> = With Ferrite
<b>U</b> = Unshielded	<b>m</b> = Length in Meters

**EUT Photo**





### 3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table.

BLE circuitry is identical to original certification, FCC ID: T8I-CONEKT. Antenna port Conducted Test data in section 4.1, 4.3, 4.4 were borrowed from original report, 103506678MPK-002. Output Power and Radiated Emissions were remeasured to check for compliance.

### 3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by Farpointe Data, Inc..

### 3.5 Mode of Operation during Test

During the transmitter tests, the transmitter was setup to transmit maximum communication and RF power levels.

EUT was placed into transmit mode at the lowest (2402MHz) middle (2442MHz), and highest (2480MHz) channels

### 3.6 Modifications Required for Compliance

No modifications were made by the manufacturer or Intertek to the EUT in order to bring the EUT into compliance.

### 3.7 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

**4.0 Measurement Results**

4.1 6-dB Bandwidth and 99% Occupied Bandwidth  
FCC Rule: 15.247(a)(2); RSS-247, 5.2.a) and RSS-GEN;

4.1.1 Requirement

The minimum 6-dB bandwidth shall be at least 500 kHz

4.1.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

For FCC 6dB Channel Bandwidth the Procedure described in the FCC Publication KDB 558074 D01 Meas Guidance v05r02 was used to determine the DTS occupied bandwidth. Section 11.8.1 Option 1 of ANSI 63.10 was used.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer. The resolution bandwidth is set to 1% of the selected span as is without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

4.1.3 Test Result

Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, kHz	Occupied bandwidth, RSS-GEN, MHz	Plot
2402	714.743	--	1.1
	--	1.069	1.4
2440	705.128	--	1.2
	--	1.054	1.5
2480	714.743	--	1.3
	--	1.737	1.6


<b>Date of Test:</b>	September 11, 2018
<b>Results</b>	<b>Complies</b>

Plot 1. 1

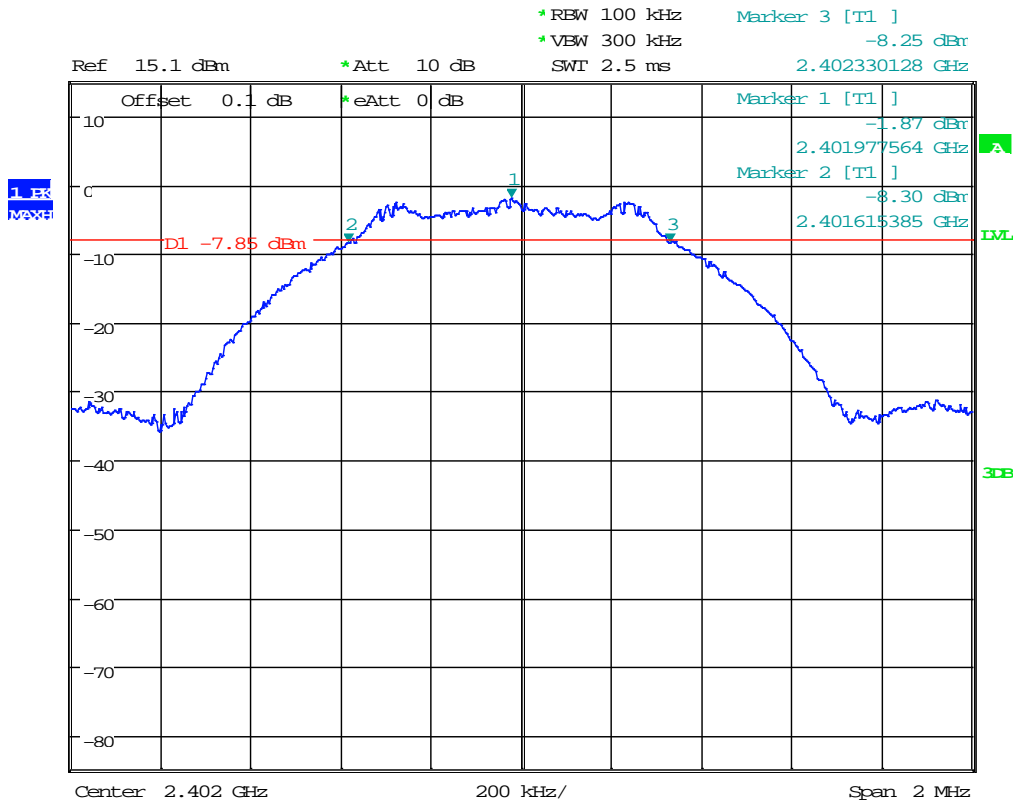


Date: 11.SEP.2018 11:18:32

Plot 1.2

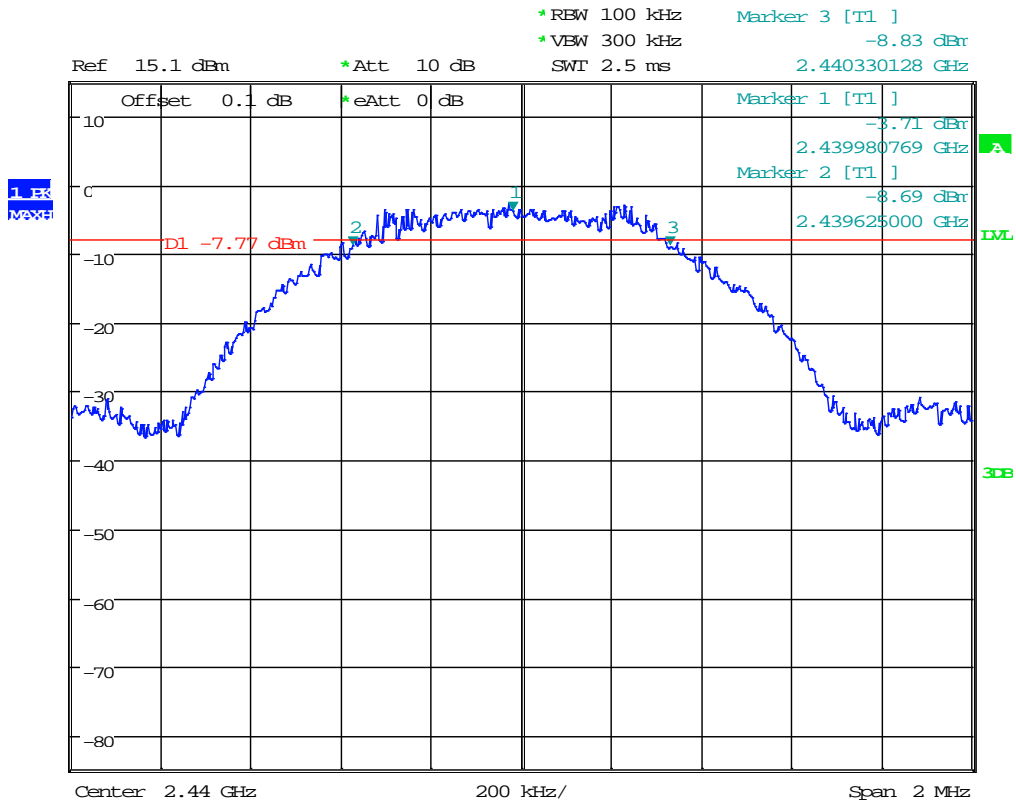


Date: 11.SEP.2018 11:23:11

Plot 1.3

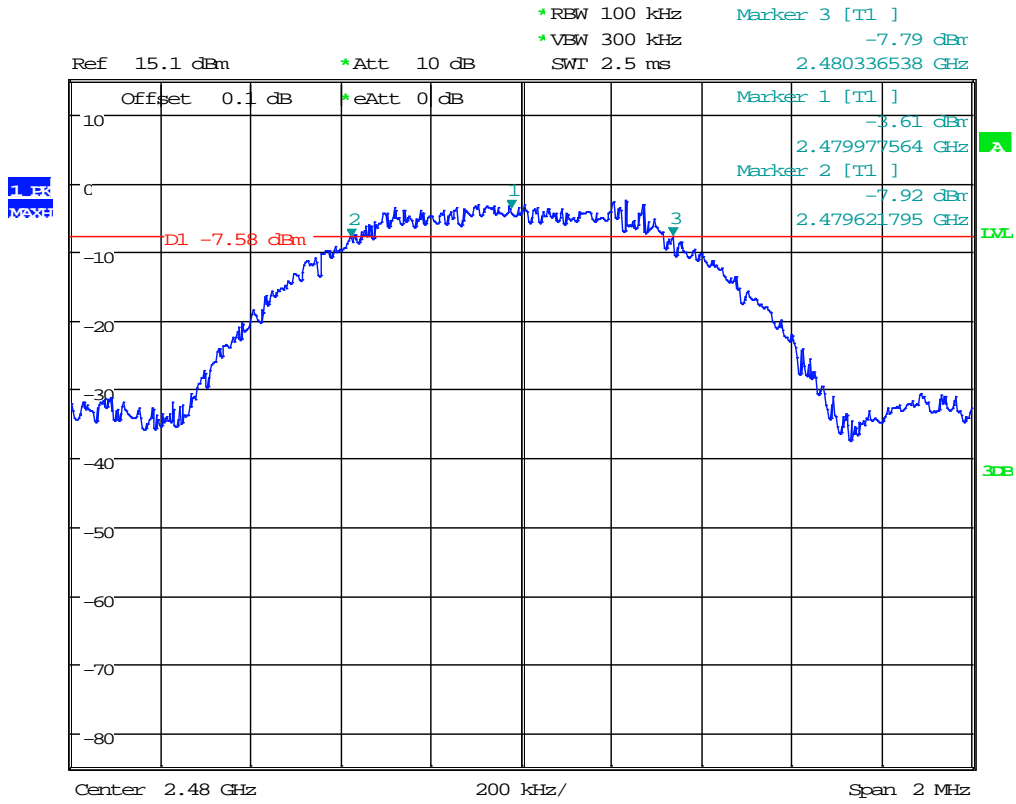


Date: 11.SEP.2018 11:25:58

Plot 1.4

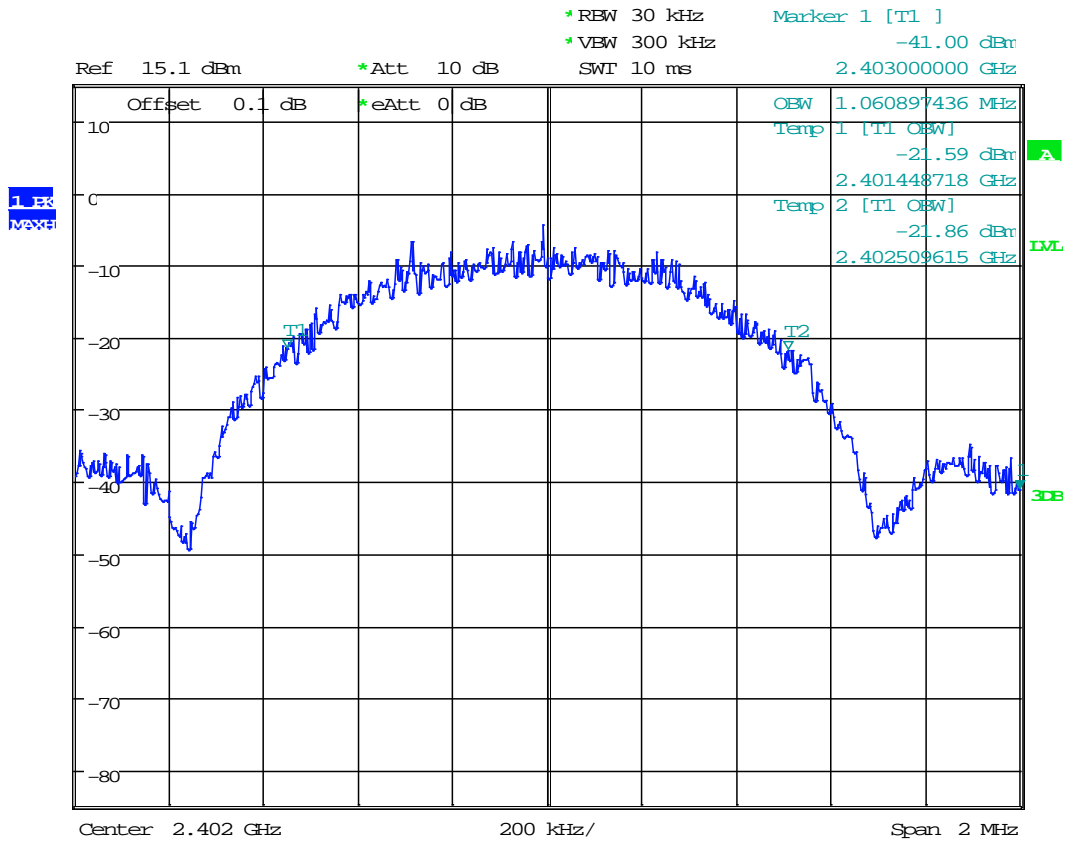


Date: 11.SEP.2018 11:34:26

Plot 1.5

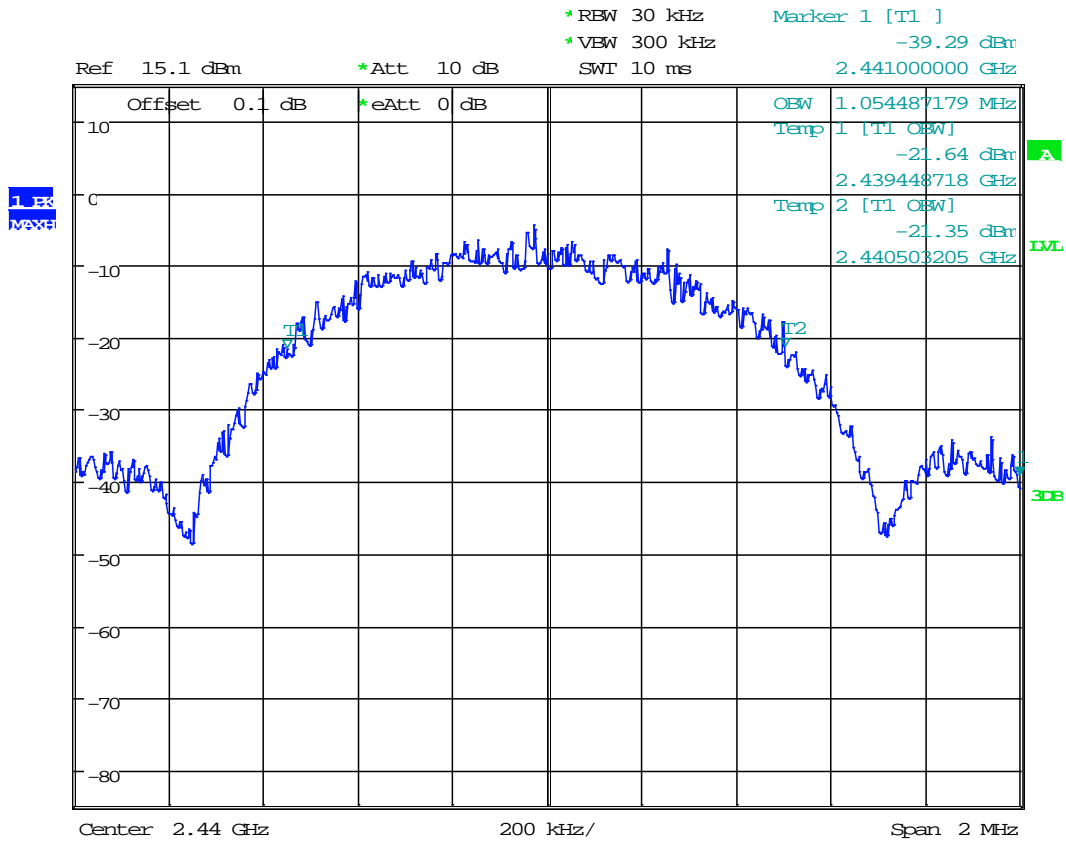

Date: 11.SEP.2018 11:33:18

Plot 1.6

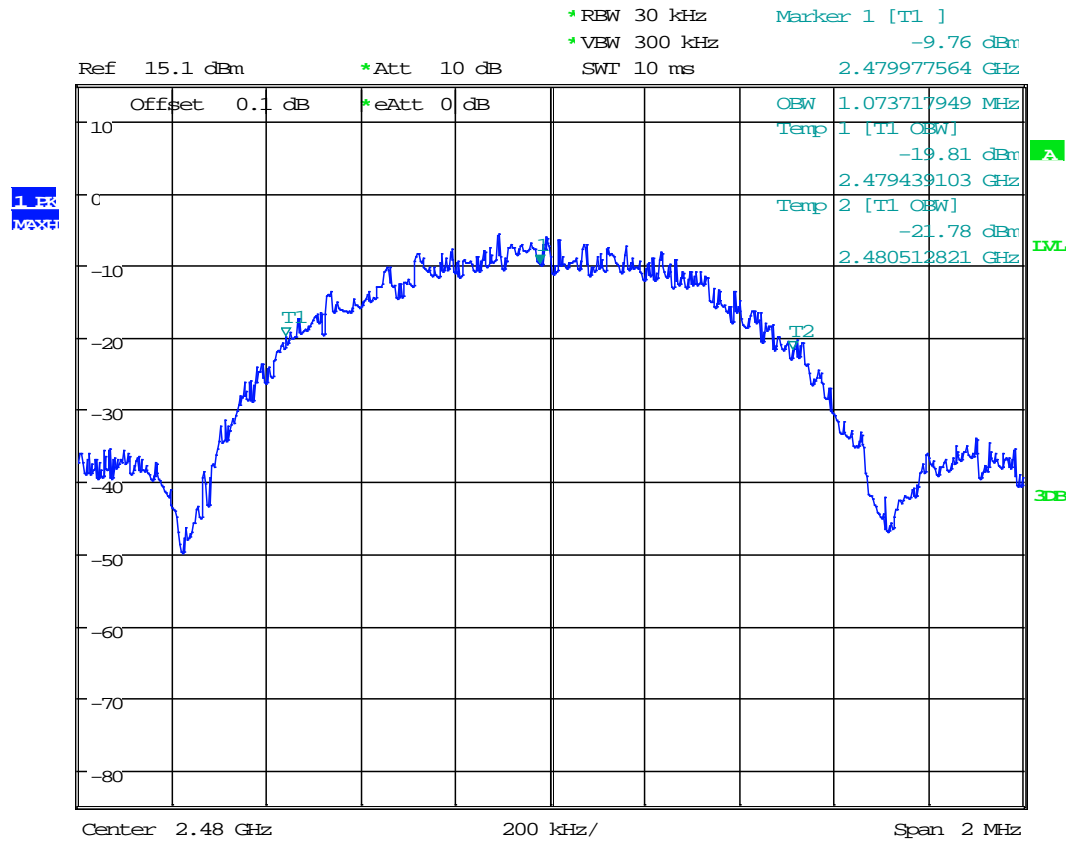

Date: 11.SEP.2018 11:31:24



4.2 Maximum Peak Conducted Output Power at Antenna Terminals  
FCC Rule: 15.247(b)(3); RSS-247, 5.4.d);

4.2.1 Requirement

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt or 30 dBm. For antennas with gains greater than 6 dBi, transmitter output level must be decreased appropriately, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02 was used. Specifically, section 11.9.1.1  $RBW \geq DTS$  bandwidth in ANSI 63.10.

1. Set the  $RBW \geq DTS$  Bandwidth
2. Set the  $VBW \geq 3 \times RBW$
3. Set the span  $\geq 3 \times RBW$
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max Hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

A spectrum analyzer was connected to the antenna port of the transmitter.

4.2.3 Test Result

Refer to the following plots 2.1 – 2.3 for the test details.

Frequency	Conducted Power (peak)		Plot
	MHz	dBm	
2402	1.74	1.493	2.1
2442	1.63	1.455	2.2
2480	1.65	1.462	2.3

Tested By	Test Date
Aaron Chang	May 7, 2020







4.3 Maximum Power Spectral Density  
FCC: 15.247 (e); RSS-247, 5.2.b);

4.3.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna should not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02, specifically section 11.10.2 Method PKPSD (peak PSD) of ANSI 63.10.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


4.3.3 Test Result

Refer to the following plots for the test result

Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	-16.52	8.0	-24.52	3.1
2440	-14.95	8.0	-22.95	3.2
2480	-14.94	8.0	-22.94	3.3


<b>Date of Test:</b>	September 11, 2018
<b>Results:</b>	<b>Complies</b>

Plot 3. 1

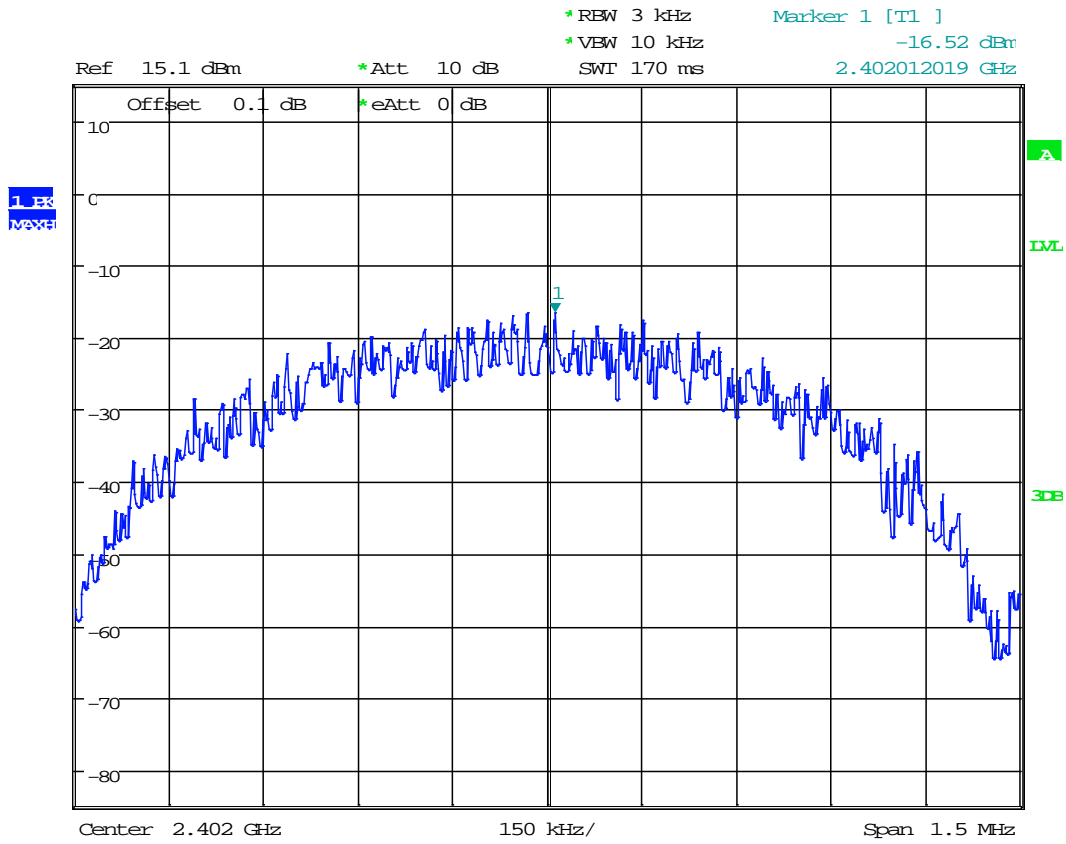


Date: 11.SEP.2018 11:39:49

Plot 3.2

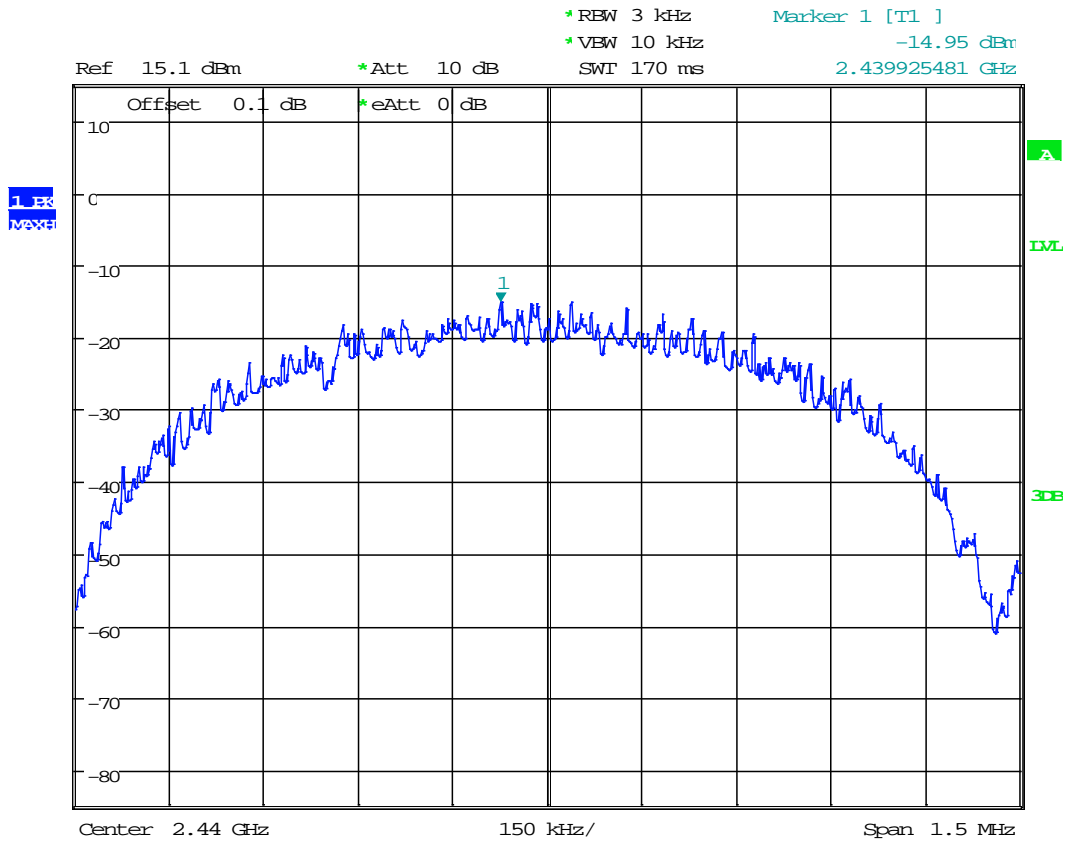

Date: 11.SEP.2018 11:44:51

Plot 3.3

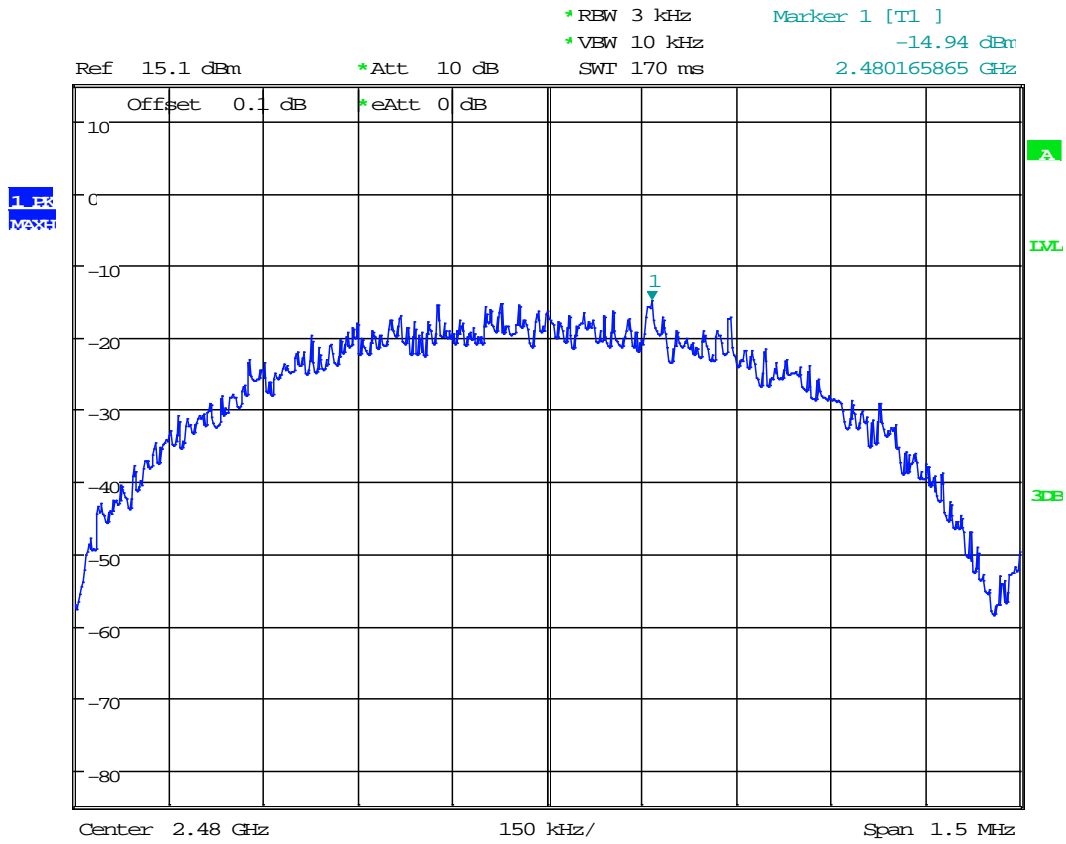

Date: 11.SEP.2018 11:43:38



4.4 Out of Band Antenna Conducted Emission  
FCC: 15.247(d); RSS-247, 5.5;

4.4.1 Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be below the maximum in-band 100 kHz emissions by at least 20 dB (if peak power of in-band emission is measured) or 30 dB (if average power of in-band emission is measured).

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

4.4.2 Procedure

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02, specifically section 11.11 DTS Emissions in non-restricted frequency bands of ANSI 63.10.

A spectrum analyzer was connected to the antenna port of the transmitter.

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq 3 \times$  RBW.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


The unwanted emissions were measured from 30 MHz to 25 GHz. Plots below are corrected for cable loss and then compared to the limits.

4.4.3 Test Result

Refer to the following plots 4.1 – 4.5 for unwanted conducted emissions. The plot shows -20dB attenuation limit line.


<b>Date of Test:</b>	September 11, 2018
<b>Results</b>	<b>Complies</b>

Tx @ Low Channel, 2400 MHz Band Edge  
Plot 4.1

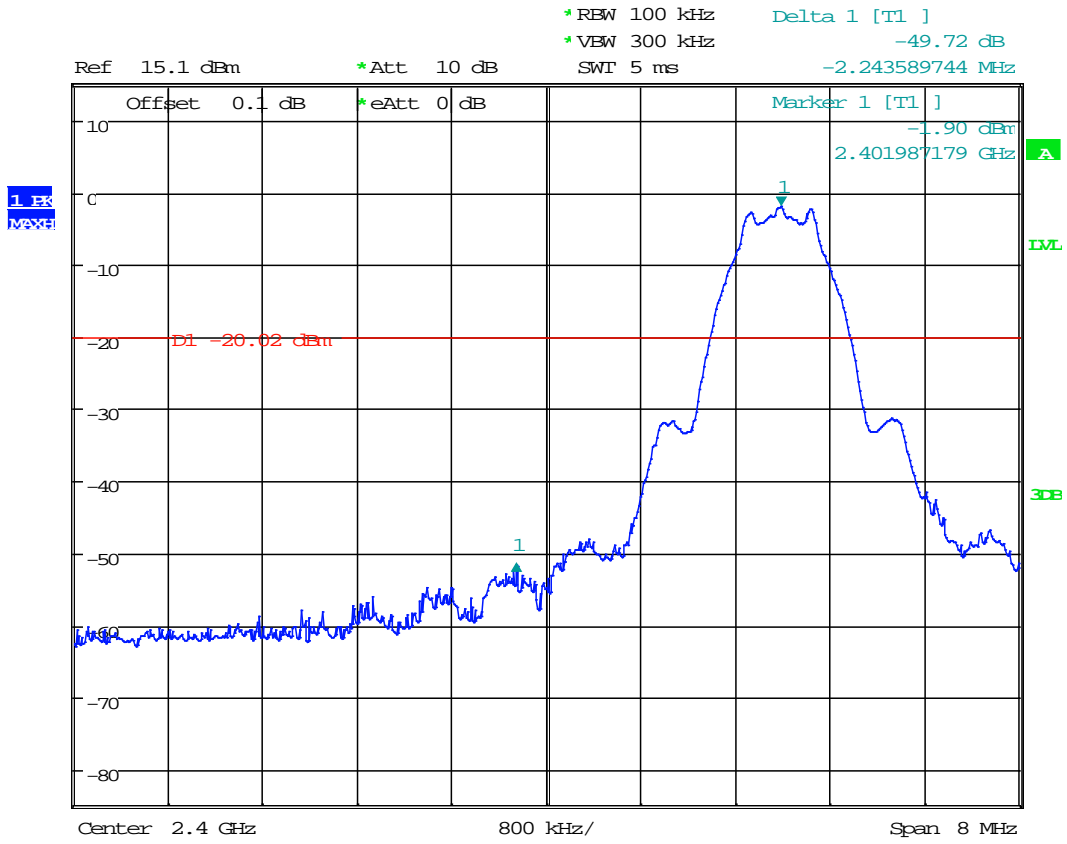


Date: 11.SEP.2018 12:03:42

Tx @ High Channel, 2483.5 MHz Band Edge  
Plot 4.2

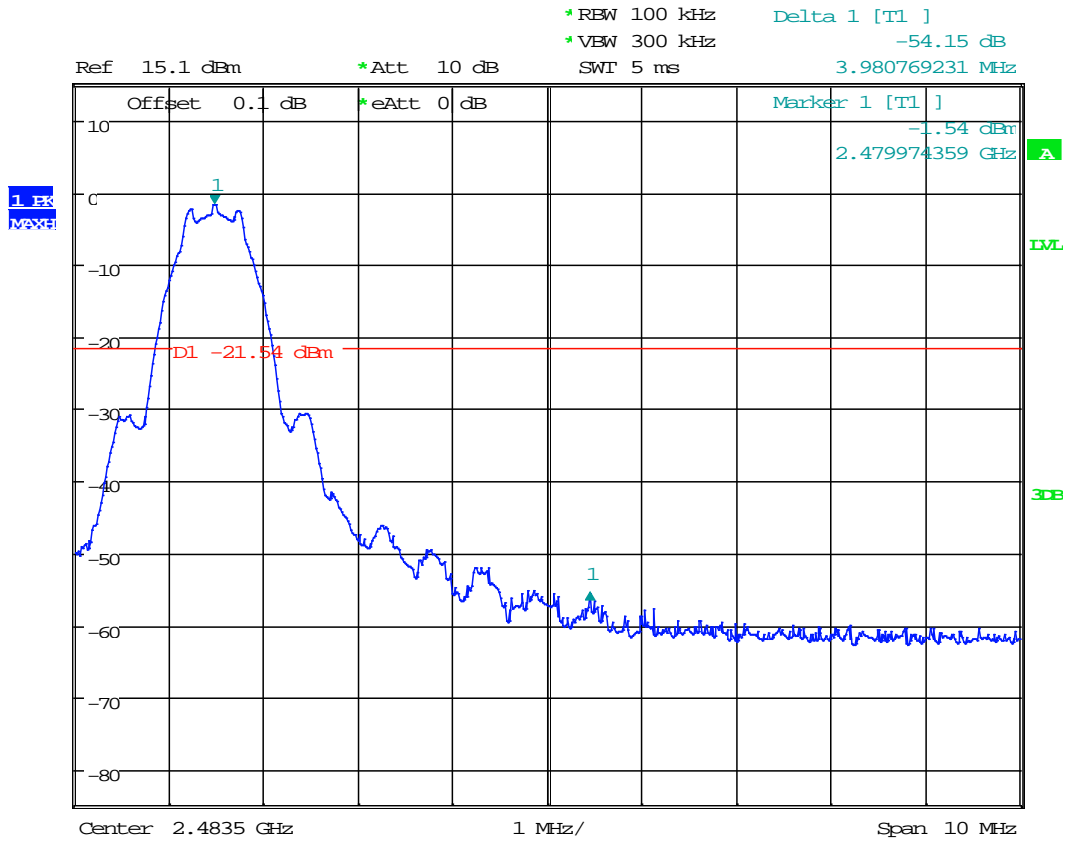


Date: 11.SEP.2018 12:06:10


Tx @ Low Channel, 2402 MHz  
30MHz -26GHz Conducted Spurious  
Plot 4.3

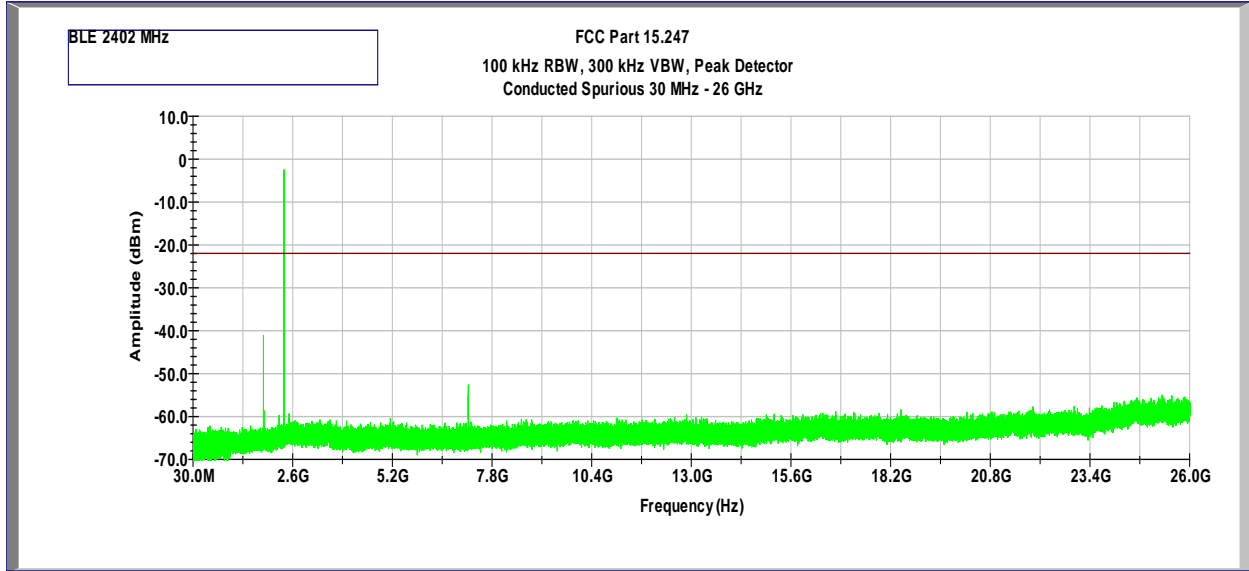

Tx @ Mid Channel, 2440 MHz  
30MHz -26GHz Conducted Spurious  
Plot 4.4

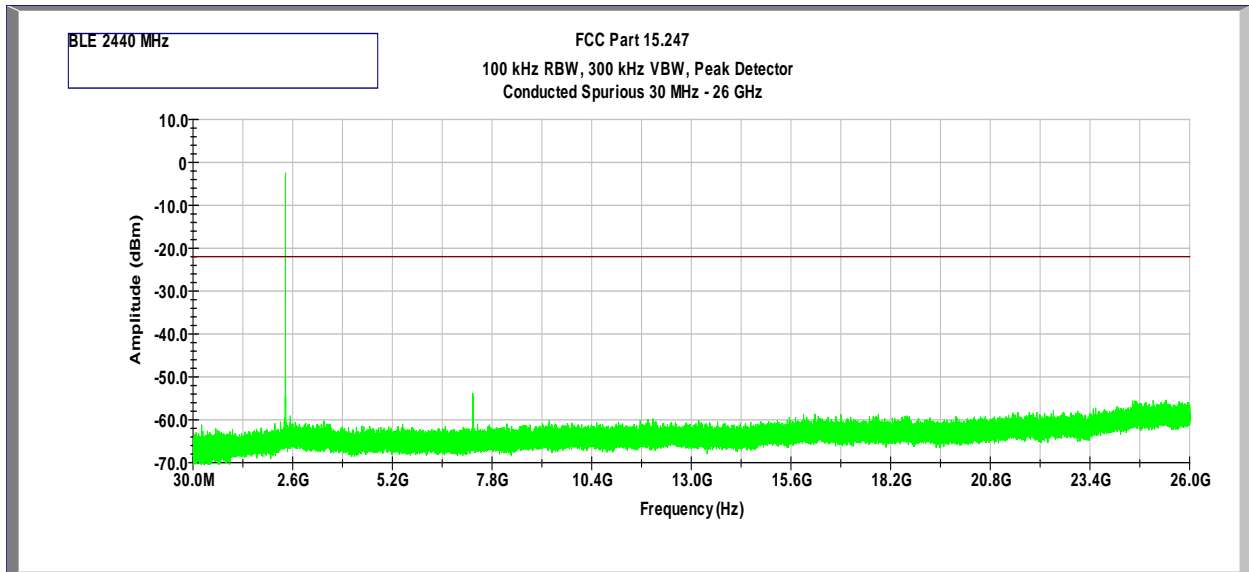

Tx @ High Channel, 2480 MHz  
30MHz -26GHz Conducted Spurious  
Plot 4.5

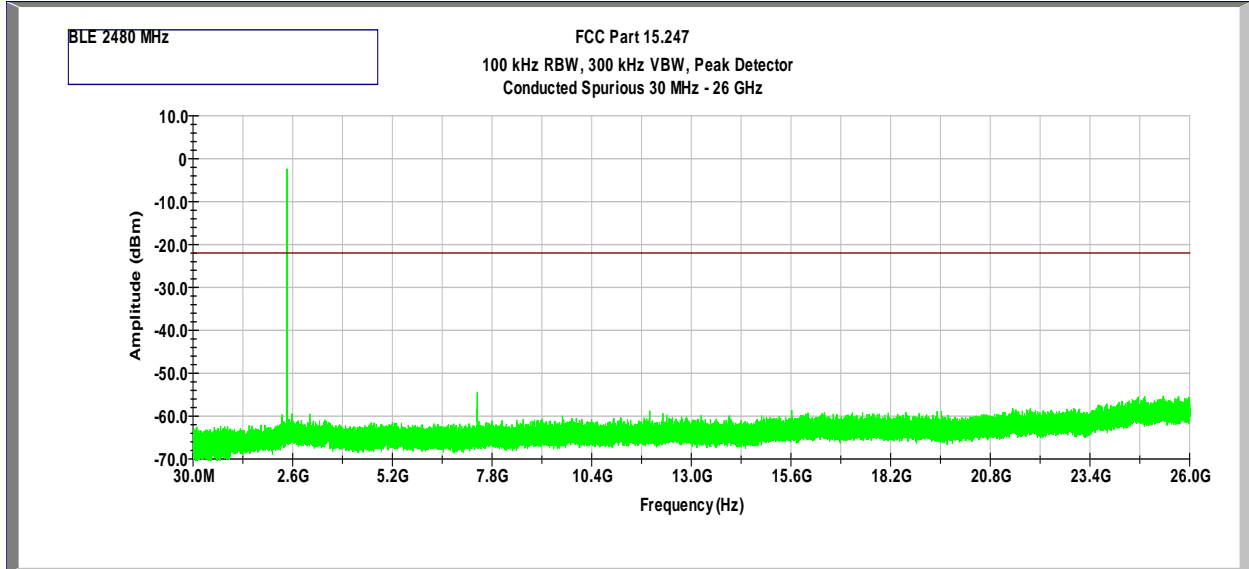

4.5 Transmitter Radiated Emissions  
FCC Rules: 15.247(d), 15.209, 15.205; RSS-247, 5.5;

4.5.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 25 GHz according to the procedure described in ANSI C63.10: 2013. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 1 GHz to 18GHz had a 2.4-2.5GHz notch filter in place. A preamp was used from 30MHz to 26GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 26GHz.

Data is presented with the worst-case configuration (the configuration which resulted in the highest emission levels).

### 4.5.3 Field Strength Calculation

#### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$ ; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB( $\mu$ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB( $\mu$ V/m). This value in dB( $\mu$ V/m) was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB( $\mu$ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

FS =  $52.0 + 7.4 + 1.6 - 29.0 = 32$  dB( $\mu$ V/m).

Level in  $\mu$ V/m = Common Antilogarithm [ $(32 \text{ dB}\mu\text{V/m})/20$ ] = 39.8  $\mu$ V/m.

4.5.4 Test Results


All testing in this section were performed by radiated measurements.

<b>Tested By</b>	<b>Test Date</b>
Aaron Chang	March 17 & May 6-7, 2020



**Test Results: 15.209/15.205 Radiated Restricted Band Emissions**


**Out-of-Band Radiated spurious emissions at the Band-edge @3m distance  
2310–2390 MHz, Peak Scan with Peak and Average Limit**

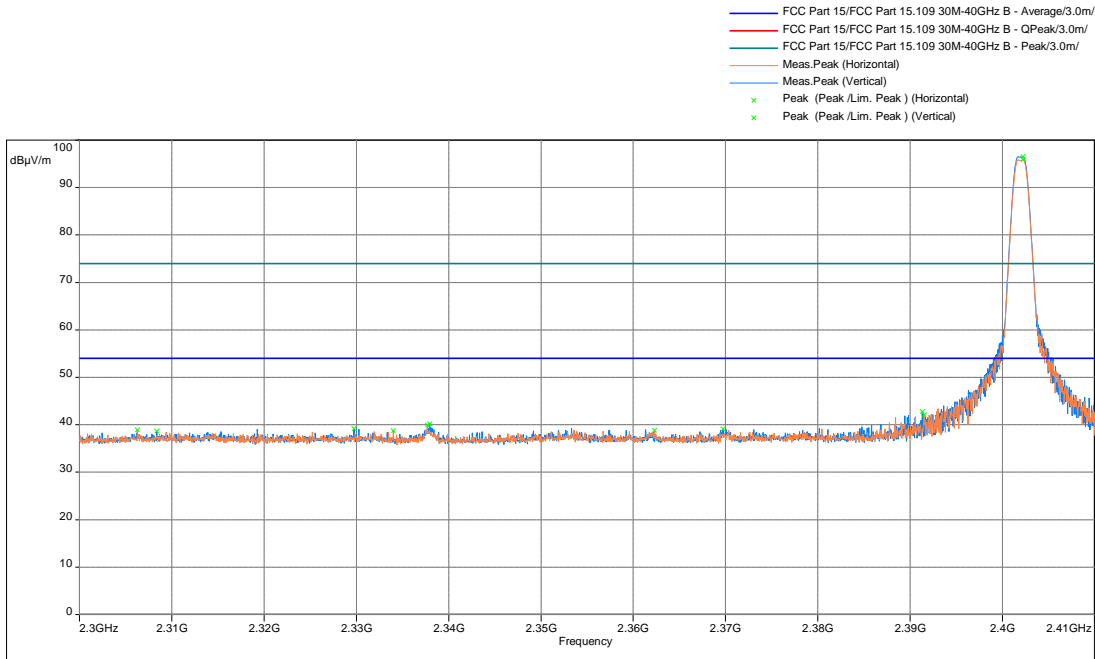

Frequency	Corrected Amplitude	Peak Limit	Margin	Height	Angle	Detector	Polarity	Correction
GHz	dBµV/m	dBµV/m	dB	m	deg			
2390	35.55	74	-38.45	1.98	346.25	Peak	Horizontal	5.1


Frequency	Corrected Amplitude	Average Limit	Margin	Height	Angle	Detector	Polarity	Correction
GHz	dBµV/m	dBµV/m	dB	m	deg			
2390	35.55	54	-18.45	1.98	346.25	Peak	Horizontal	5.1

**Out-of-Band Radiated spurious emissions at the Band-edge, @3m distance  
2483.5–2500 MHz, Peak Scan with Peak Limit**

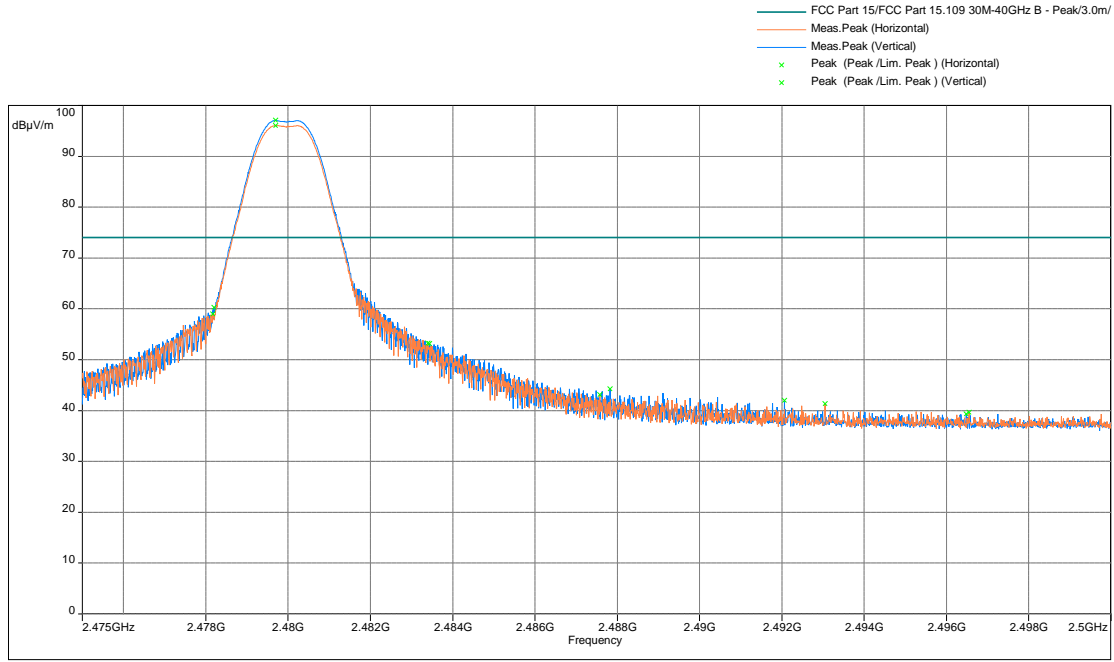

Frequency	Corrected Amplitude	Peak Limit	Margin	Height	Angle	Detector	Polarity	Correction
GHz	dBµV/m	dBµV/m	dB	m	deg			
2483.5	53.21	74	-20.79	1.02	68.75	Peak	Horizontal	5.2
2483.5	53.2	74	-20.8	1.51	30.25	Peak	Vertical	5.2

**Out-of-Band Radiated spurious emissions at the Band-edge, @3m distance  
2483.5–2500 MHz, Average Scan with Average Limit**

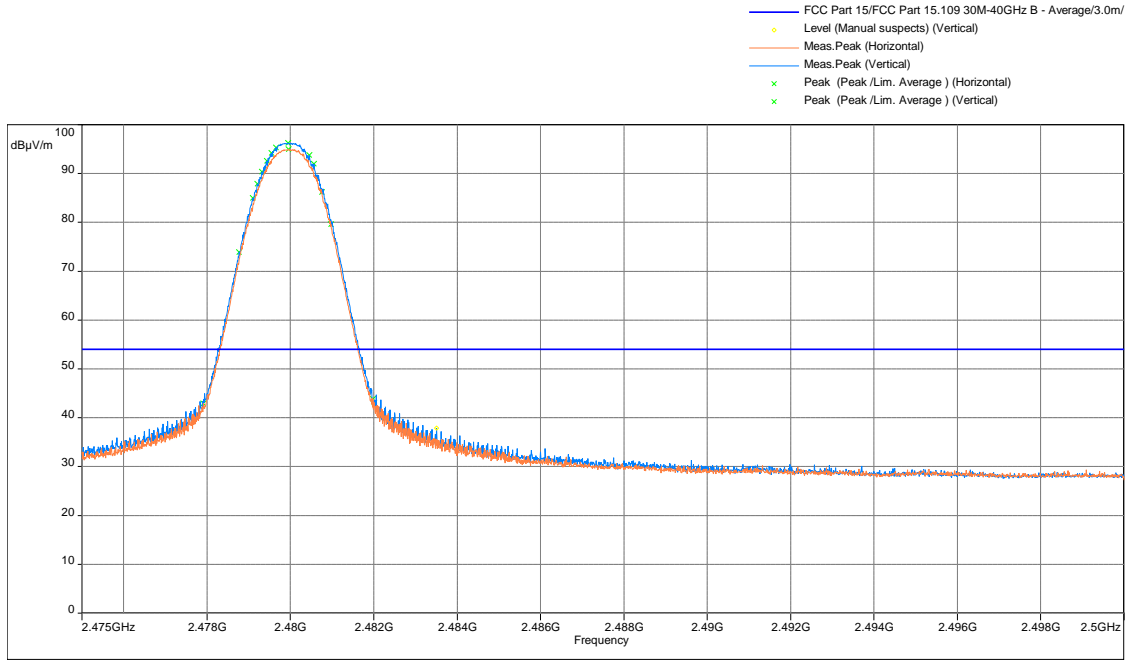


Frequency	Corrected Amplitude	Average Limit	Margin	Height	Angle	Detector	Polarity	Correction
GHz	dBµV/m	dBµV/m	dB	m	deg			
2483.5	37.9	54	-16.1	1.01	30.25	Average	Vertical	5.2


**Out-of-Band Radiated Spurious Emissions**

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz


**Radiated Spurious Emissions 30 MHz - 1000 MHz**

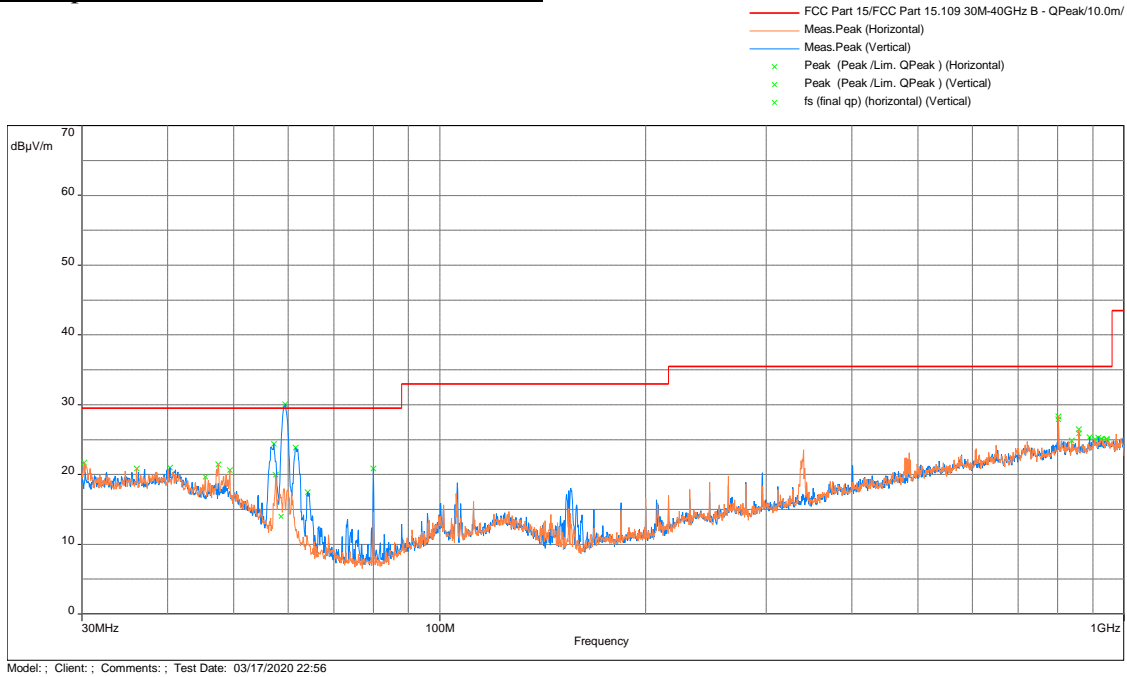

**Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak and Avg Limit**

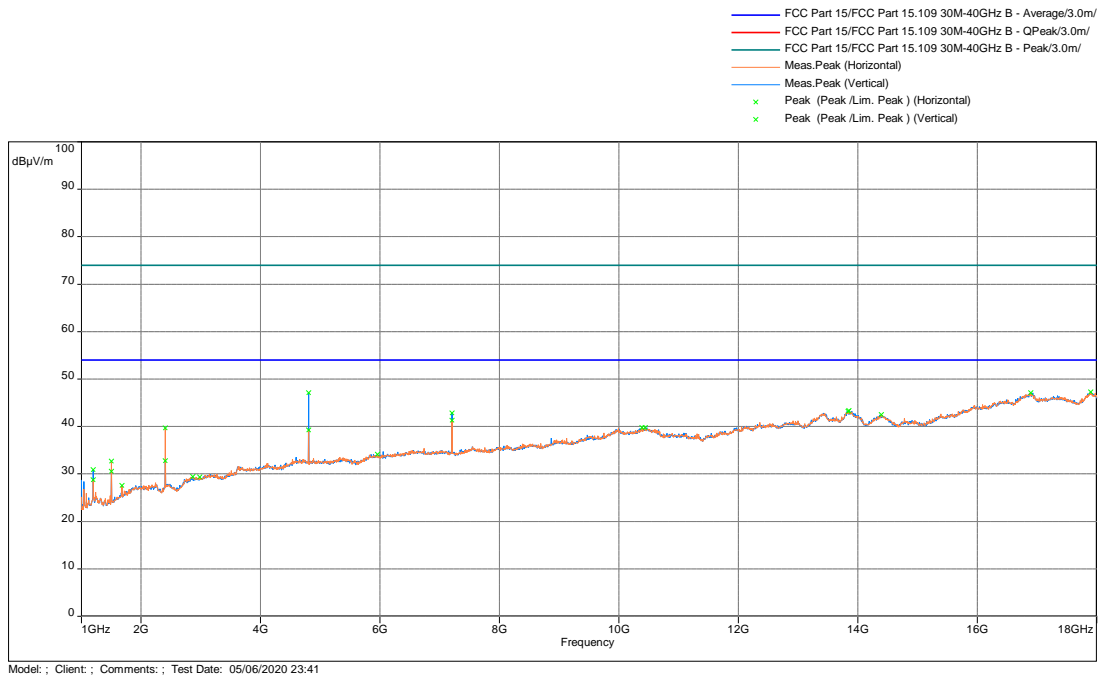

Radiated Spurious Emissions 18 - 26 GHz, Peak Scan vs Peak & Average Limit

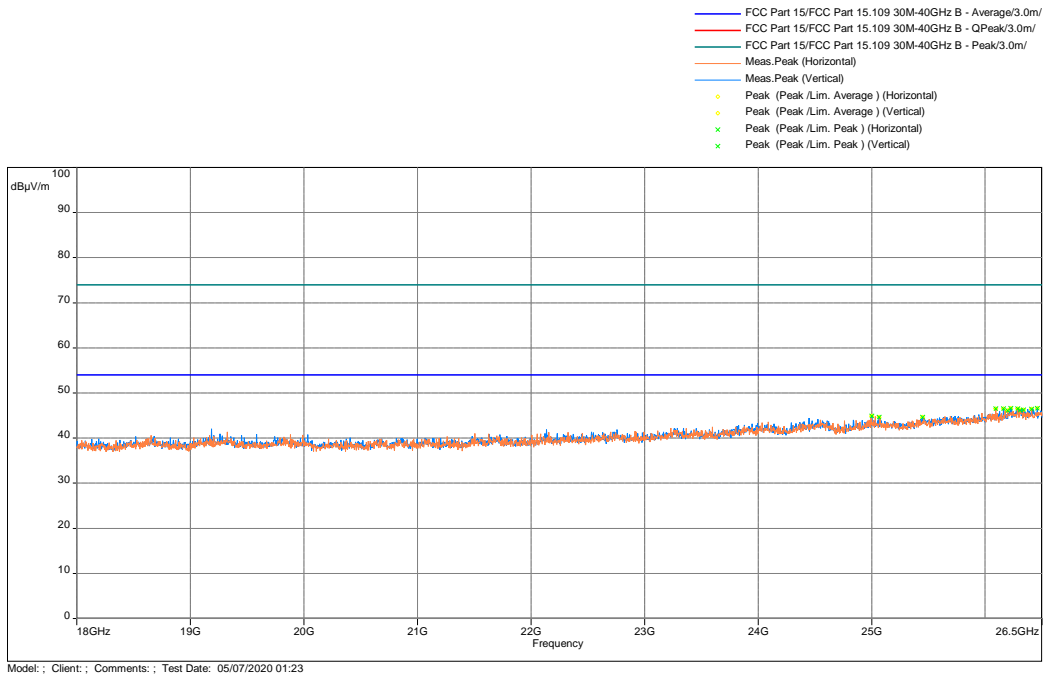

Freq. MHz	QP FS@10m dB(uV/m)	Limit dB(µV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
30.226	21.7	29.5	-7.8	3.98	226.75	Horizontal	-6.66
57.225	24.37	29.5	-5.13	2.5	326	Vertical	-13.97
58.616	14.01	29.5	-15.49	3.88	317.25	Vertical	-14.73
61.557	23.83	29.5	-5.67	2.5	326	Vertical	-15.7
801.829	28.3	35.5	-7.2	1	126.75	Horizontal	-1.1


Frequency GHz	FS@3m dBµV/m	Limit dBµV/m	Margin dB	Height m	Angle deg	Detector	Polarity	Correction
4803.467	47.12	74	-26.88	1.49	35.75	Peak	Vertical	9.28
4803.467	47.12	54	-6.88	1.49	35.75	Peak	Vertical	9.28

Note: FS = RA + Correction  
Correction = AF + CF – Preamp


<b>Results</b>	<b>Complies</b>
----------------	-----------------

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2442 MHz


Radiated Spurious Emissions 30 MHz - 1000 MHz

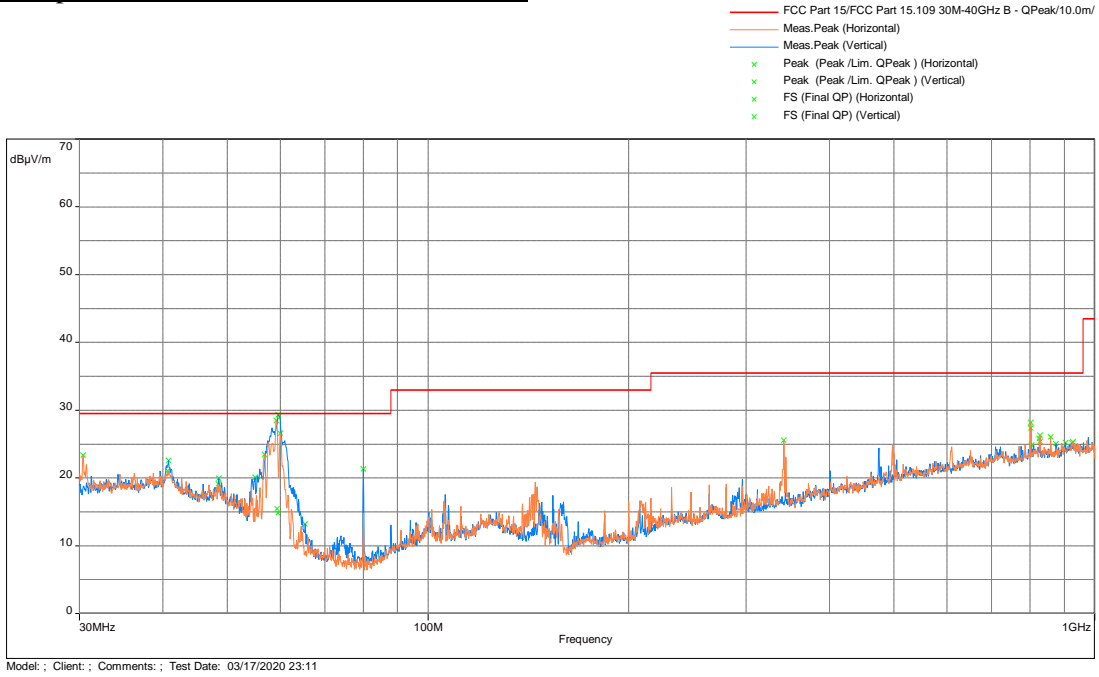

Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak and Avg Limit

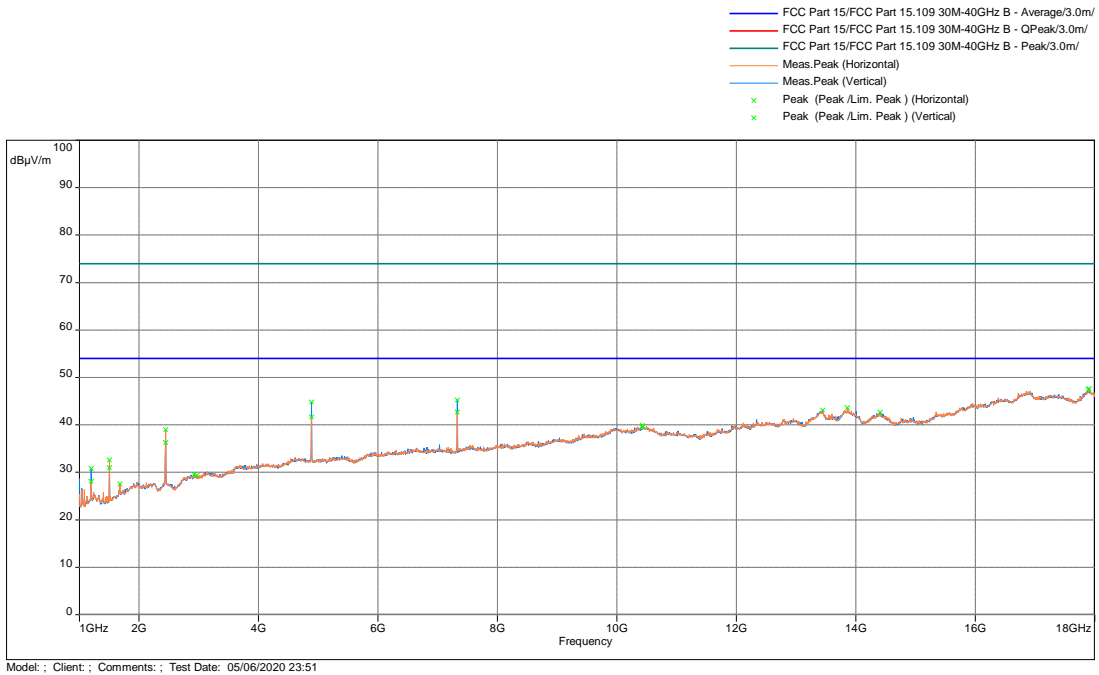

Radiated Spurious Emissions 18 - 26 GHz, Peak Scan vs Peak & Average Limit

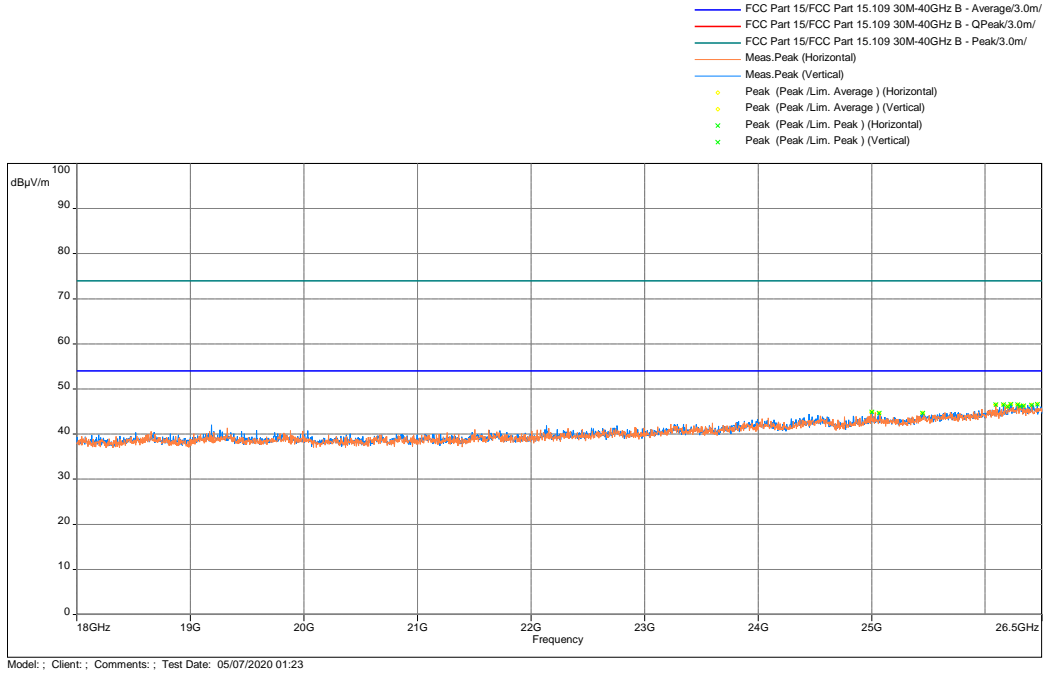

Freq. MHz	QP FS@10m dB(uV/m)	Limit dB(µV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
30.388	23.39	29.5	-6.11	3.98	194.75	Horizontal	-6.67
40.832	22.6	29.5	-6.9	2.48	66.5	Vertical	-6.57
56.869	23.5	29.5	-6	3.98	131.25	Horizontal	-13.76
59.374	15.46	29.5	-14.04	3.72	174.75	Horizontal	-15.02
59.511	14.82	29.5	-14.68	3.15	328.75	Vertical	-15.06


Frequency GHz	FS@3m dBµV/m	Limit dBµV/m	Margin dB	Height m	Angle deg	Detector	Polarity	Correction
4883.933	44.81	74	-29.19	1.99	277.5	Peak	Vertical	9.48
4883.933	44.81	54	-9.19	1.99	277.5	Peak	Vertical	9.48

Note: FS = RA + Correction  
Correction = AF + CF – Preamp


<b>Results</b>	<b>Complies</b>
----------------	-----------------

Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

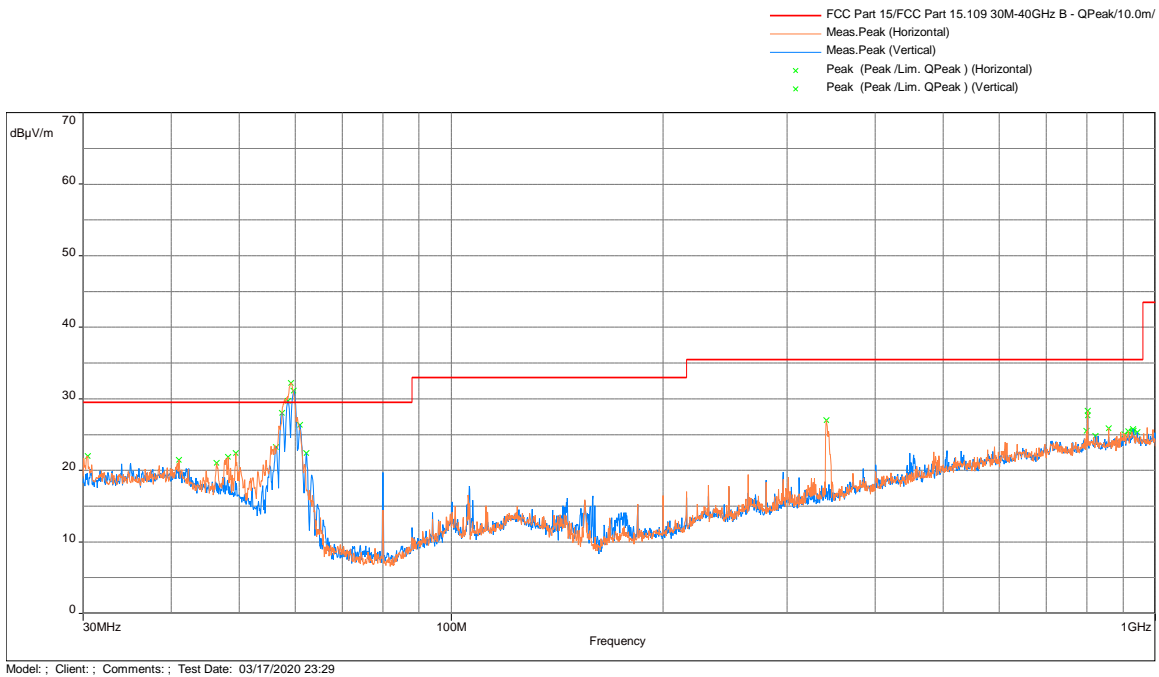


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak and Avg Limit

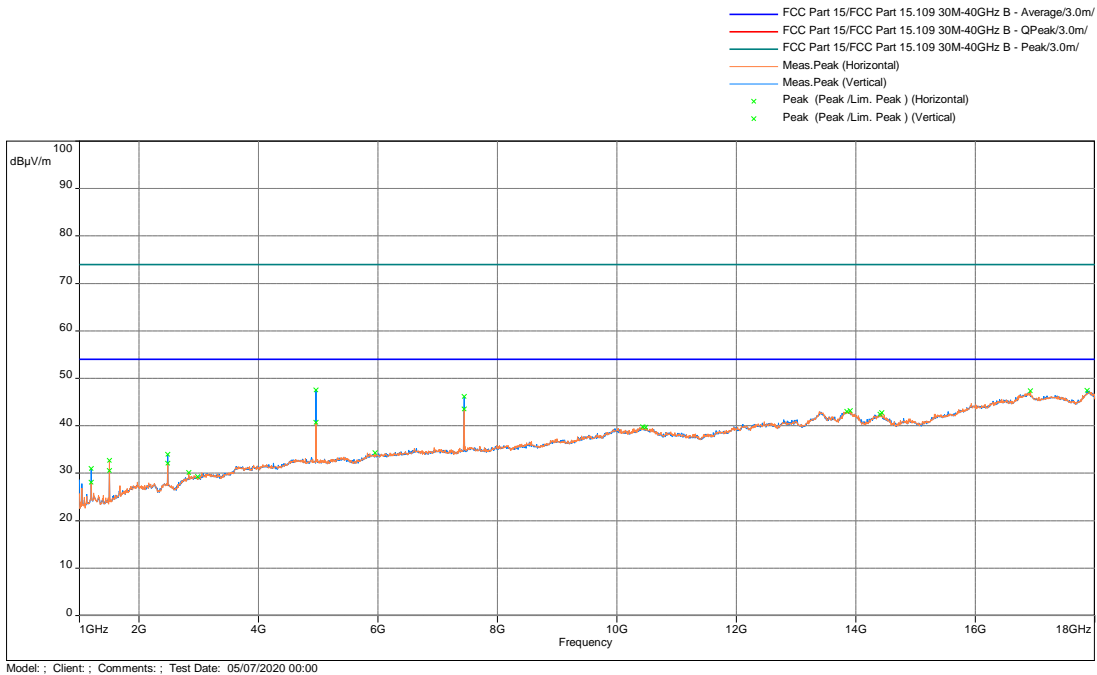



**Radiated Spurious Emissions 18 - 26 GHz, Peak Scan vs Peak & Average Limit**

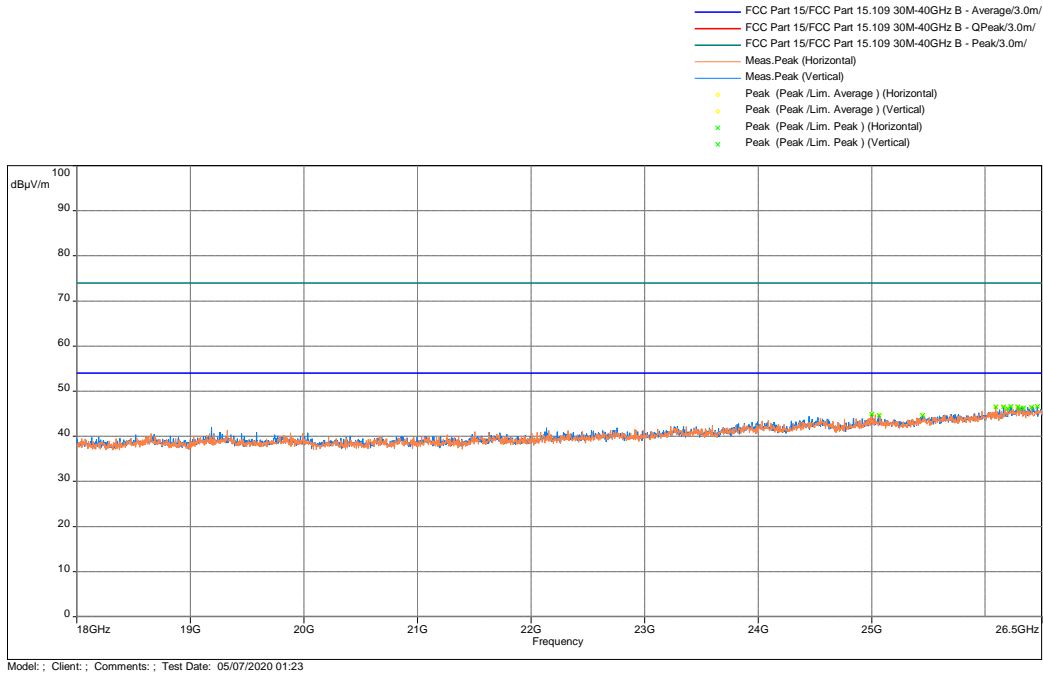

Freq. MHz	QP FS@ 10m dB(uV/m)	Limit dB(µV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
59.197	12.2	29.5	-17.3	4	352.25	Horizontal	-14.97
59.747	11.11	29.5	-18.39	3.98	338.75	Vertical	-15.13
58.647	11.67	29.5	-17.83	3.98	338.75	Vertical	-14.74
57.483	14.52	29.5	-14.98	3.98	338.75	Vertical	-14.12

Frequency GHz	FS@3m dBµV/m	Limit dBµV/m	Margin dB	Height m	Angle deg	Detector	Polarity	Correction
4959.867	47.52	74	-26.48	1.99	231.75	Peak	Vertical	9.67
4959.867	47.52	54	-6.48	1.99	231.75	Peak	Vertical	9.67

Note: FS = RA + Correction  
Correction = AF + CF – Preamp



<b>Results</b>	<b>Complies</b>
----------------	-----------------

#### 4.2.5 Test Setup Configuration

**The following photographs show the testing configurations used.**



4.5.8 Test Setup Configuration (Continued)

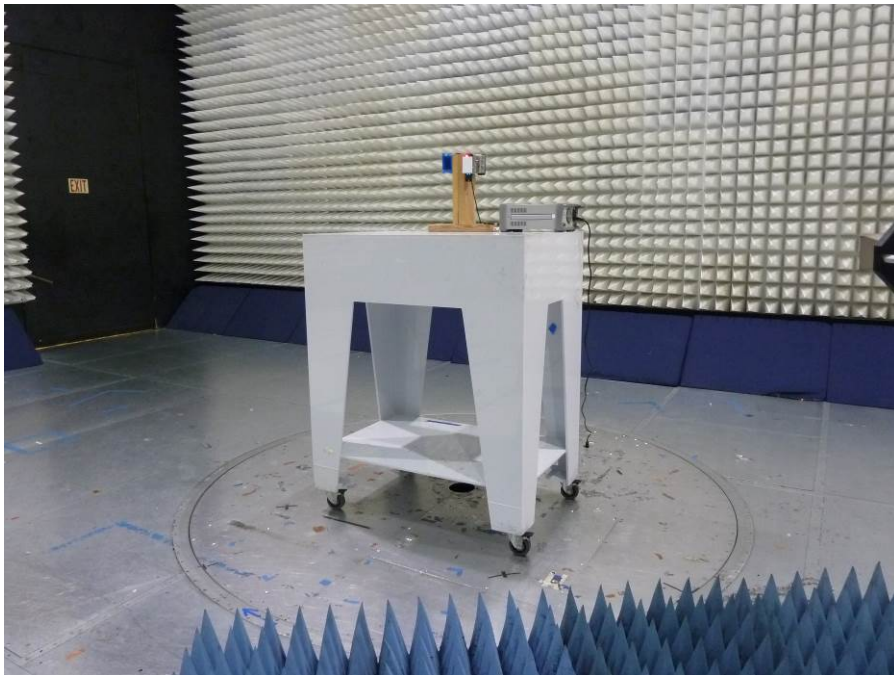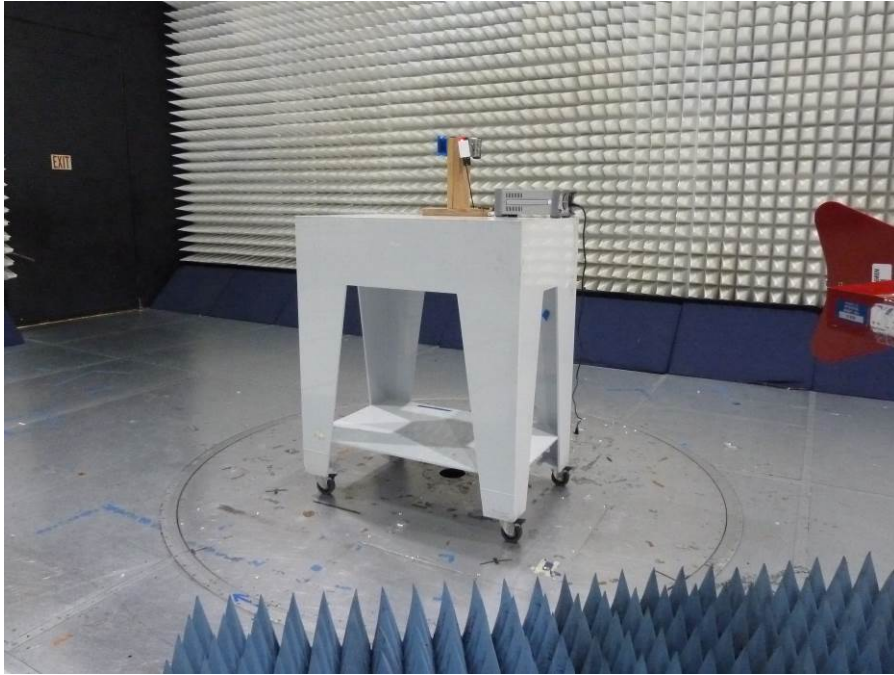

4.6 AC Line Conducted Emission  
FCC: 15.207; RSS-GEN;

4.6.1 Requirement

Frequency Band MHz	Class B Limit dB(μV)		Class A Limit dB(μV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

Note: \*Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.

4.6.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.10-2013.


4.6.3 Test Result

*15.207, 120VAC 60Hz, with BLE Transmitter On*

**Phase 1**

- CISPR Limit/CISPR Limit B - Average/
- CISPR Limit/CISPR Limit B - QPeak/
- Meas.QPeak (Phase 1)
- Mes. CISPR AVG (Phase 1)
- o QPeak (QPeak/Lim. QPeak) (Phase 1)
- x CISPR AVG (CISPR AVG /Lim. Average) (Phase 1)


Sub-range 1  
Frequencies: 150 kHz - 30 MHz (Mode: - Step: 2.25 kHz)  
Settings: BBW: 9kHz, VBW: 30kHz, Sweep time: 1e+03 ms, Attenuation: 10 dB, Sweep count 3, Preamp: Off, LN Preamp: Off, Preselector: On  
Line:Phase 1

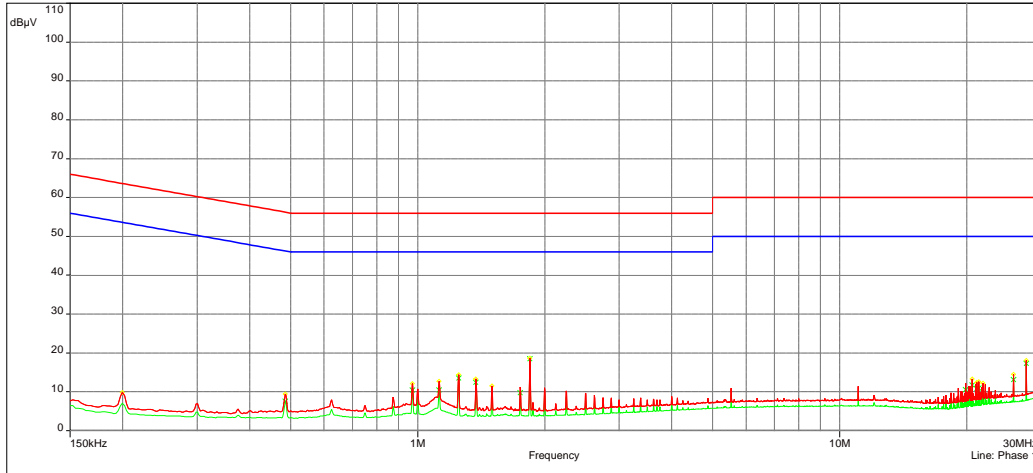

**Phase 2**

- CISPR Limit/CISPR Limit B - Average/
- CISPR Limit/CISPR Limit B - QPeak/
- Meas.QPeak (Phase 2)
- Mes. CISPR AVG (Phase 2)
- o QPeak (QPeak/Lim. QPeak) (Phase 2)
- x CISPR AVG (CISPR AVG /Lim. Average) (Phase 2)

Sub-range 2  
Frequencies: 150 kHz - 30 MHz (Mode: - Step: 2.25 kHz)  
Settings: BBW: 9kHz, VBW: 30kHz, Sweep time: 1e+03 ms, Attenuation: 10 dB, Sweep count 1, Preamp: Off, LN Preamp: Off, Preselector: On  
Line:Phase 2


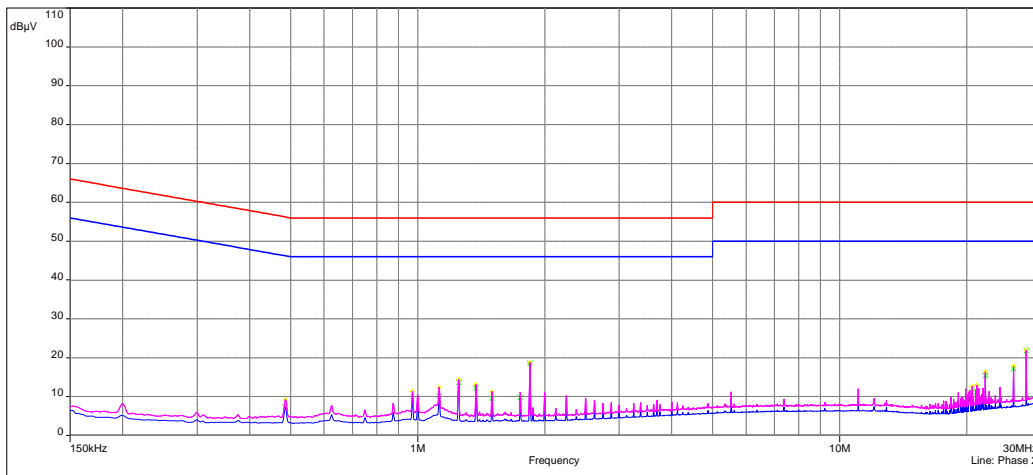


Frequency (MHz)	CISPR AVG (dBμV)	QPeak (dBμV)	Lim. Average (dBμV)	Lim. QPeak (dBμV)	CISPR AVG-Lim (dB)	QPeak-Lim (dB)	Comment	Correction (dB)
0.485	7.61	9.47	46.25	56.25	-38.64	-46.78	Phase 1	10.12
0.485	7.34	9.22	46.25	56.25	-38.9	-47.03	Phase 2	10.12
0.971	10.42	12.13	46	56	-35.58	-43.87	Phase 1	10.14
1.124	10.12	12.42	46	56	-35.88	-43.58	Phase 2	10.15
1.124	10.42	12.72	46	56	-35.58	-43.28	Phase 1	10.15
1.250	13.5	14.45	46	56	-32.5	-41.55	Phase 1	10.14
1.250	13.57	14.39	46	56	-32.43	-41.61	Phase 2	10.14
1.374	12.4	13.36	46	56	-33.6	-42.64	Phase 1	10.16
1.374	12.1	13.14	46	56	-33.9	-42.86	Phase 2	10.16
1.500	9.58	11.37	46	56	-36.42	-44.63	Phase 2	10.16
1.844	18.54	18.75	46	56	-27.46	-37.25	Phase 2	10.19
1.844	18.45	18.7	46	56	-27.55	-37.3	Phase 1	10.19
20.625	11.06	12.58	50	60	-38.94	-47.42	Phase 2	10.87
20.625	11.72	13.28	50	60	-38.28	-46.72	Phase 1	10.87
21.125	11.3	12.97	50	60	-38.7	-47.03	Phase 2	10.89
21.125	10.86	12.4	50	60	-39.14	-47.6	Phase 1	10.89
21.374	10.97	12.61	50	60	-39.03	-47.39	Phase 1	10.89
22.135	15.45	16.37	50	60	-34.55	-43.63	Phase 2	10.92
25.825	13.08	14.48	50	60	-36.92	-45.52	Phase 1	11.05
25.825	17.18	17.85	50	60	-32.82	-42.15	Phase 2	11.05
27.670	17.31	18.07	50	60	-32.69	-41.93	Phase 1	11.07
27.670	21.75	21.95	50	60	-28.25	-38.05	Phase 2	11.07
29.513	14.98	16.61	50	60	-35.02	-43.39	Phase 2	11.06

<b>Result</b> <b>Complies by 27.46 dB</b>
-------------------------------------------

4.6.4 Test Configuration Photographs

**The following photographs show the testing configurations used.**

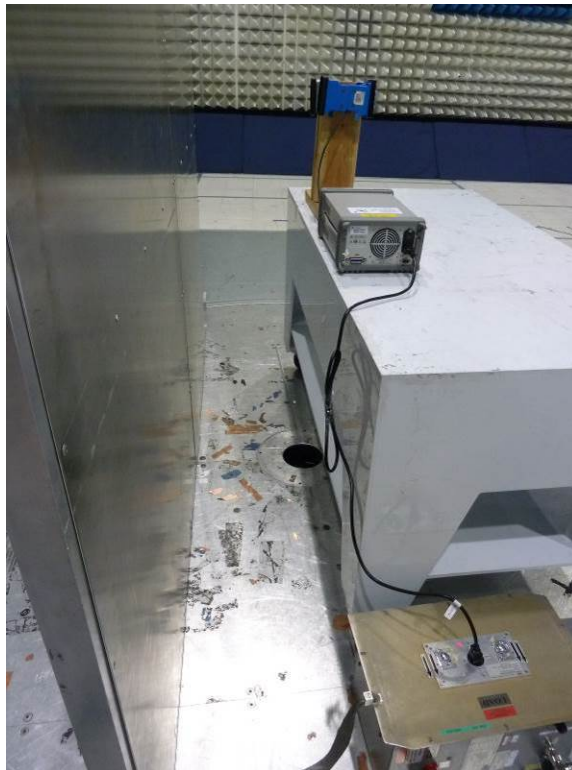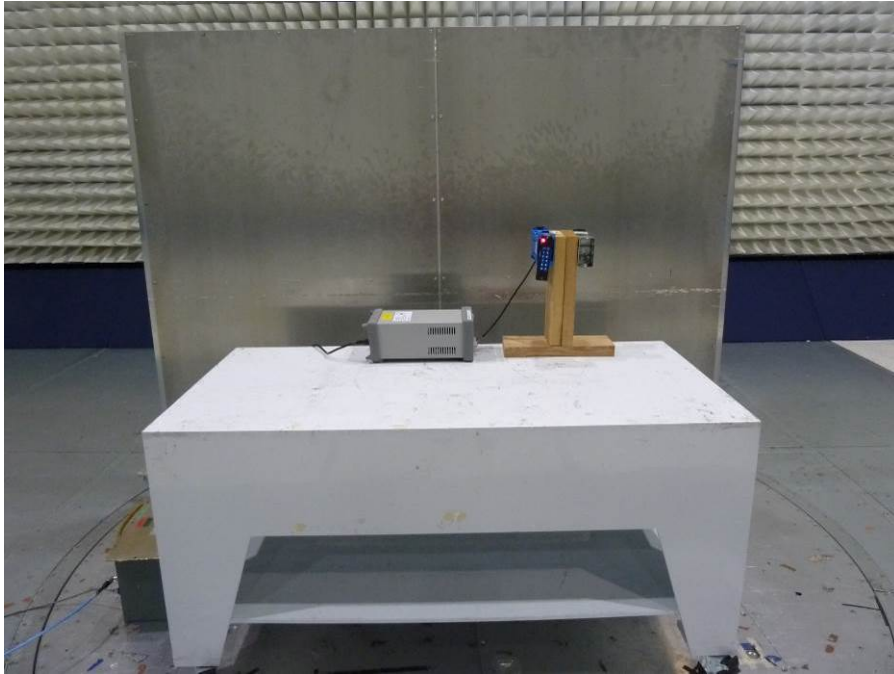

## 5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
EMI Receiver	Rohde and Schwarz	ESR7	ITS 01607	12	10/23/20
EMI Receiver	Rohde and Schwarz	ESU40	ITS 00961	12	11/07/20
Pre-Amplifier (18-40GHz)	Miteq	TTA1840-35-S-	ITS 01393	12	03/02/21
Active Horn Antenna	ETS-Lindgren	3117-PA	ITS 01365	12	07/08/20
Pyramidal Horn Antenna	EMCO	3160-09	ITS 00571	#	#
BI-Log Antenna	Teseq	CBL611D	ITS 01650	12	07/23/20
Pre-Amplifier	Sonoma Instrument	310N	ITS 01493	12	02/07/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 01462	12	08/27/20
RF Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	08/27/20
RF Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/27/20
RF Cable	TRU Corporation	TRU CORE 300	ITS 01342	12	10/07/20
Notch Filter	MICRO-TRONICS	BRM50702	ITS 01166	12	05/14/20
RF Cable	Mega Phase	EMC1-K1K1-236	ITS 01537	12	04/17/21

# No Calibration required

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
BAT-EMC	Nexio	3.17.0.10	Farpointe_3-17-2020.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)



**6.0 Document History**

<b>Revision/ Job Number</b>	<b>Writer Initials</b>	<b>Reviewers Initials</b>	<b>Date</b>	<b>Change</b>
1.0 / G104274802	AC	KV	May 18, 2020	Original document
2.0 / G104274802	AC	KV	July 21, 2020	Updated the report section 3 with model numbers information